

### Product Description

**MXLOC<sup>®</sup> 20** is designed for the bonding of cylindrical fitting parts. The product is a single component anaerobic, acrylic based product. The product cures when confined in the absence of air between close fitting metal surfaces and prevents leakage and loosening from vibration and shock.

**MXLOC<sup>®</sup> 20** offers the following characteristics:

<b>Technology</b>	Acrylic
<b>Appearance (uncured)</b>	Green liquid
<b>Chemical Form</b>	Methacrylate ester
<b>Cure</b>	Anaerobic
<b>Secondary cure</b>	Activator
<b>Components</b>	Single – requires no mixing
<b>Viscosity</b>	High
<b>Strength</b>	Medium to High
<b>Application</b>	Retaining


Applications include locating pins in radiator assemblies, bearings in transmissions and sleeves into pump housings.

### Properties of Uncured Material

	Typical Value
Specific Gravity @ 25°C	1.16
Viscosity @ 25°C	5000-12000 mPas
Flash Point	See MSDS
Fixture time	10-15 mins


### Cure speed vs. substrate

The rate of cure is dependant on substrate used. The graph below shows the breakaway strength developed with time on steel collars and pins compared to different materials and tested according to ISO 10123.

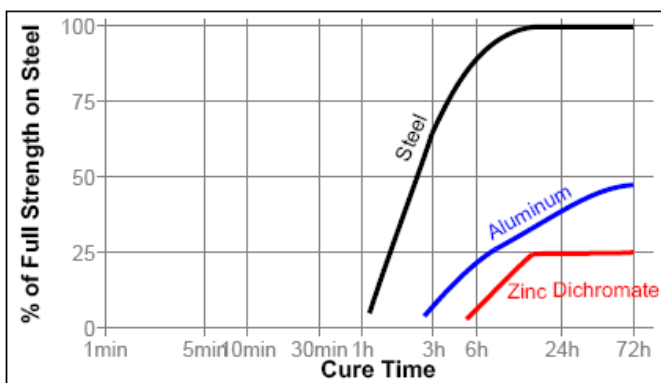


### Cure speed vs. bond gap

The rate of cure will depend on the bond gap. The graph below shows shear strength developed with time on steel collars and pins at different controlled gaps and tested according to ISO 10123.

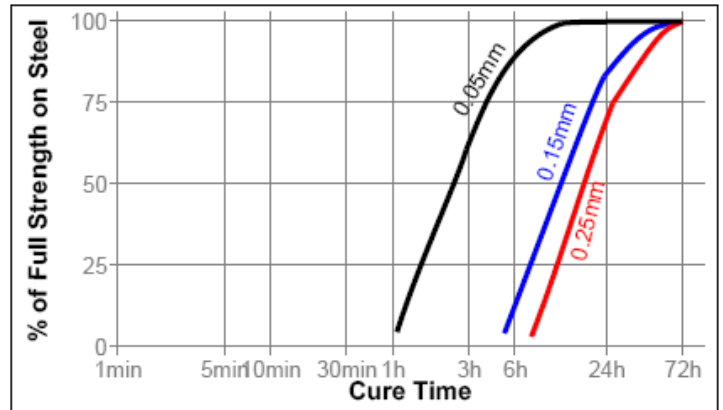

### Cure speed vs. temperature

The rate of cure is dependent on the ambient temperature. The graph below shows the breakaway strength developed with time at different temperatures on steel collars and pins tested according to ISO 10123.

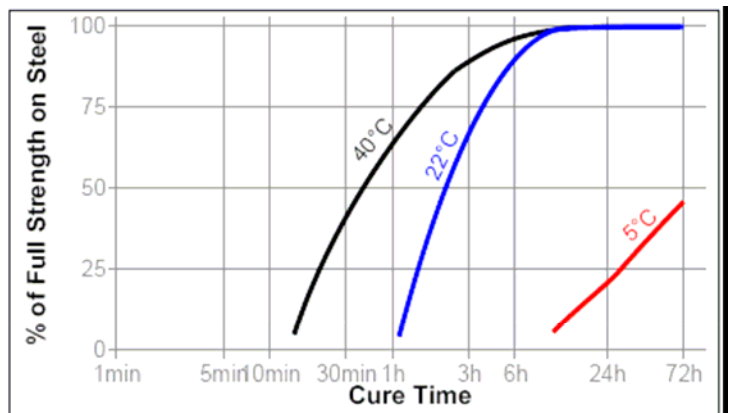

### Cure speed vs. activator

Where the cure speed is unacceptably long or large gaps are present. An activator can be applied to the surface which will improve cure speed.

### Typical performance of cured material

Operating Temperature	Typical Value -54°C - 200°C
-----------------------	--------------------------------


(After 24 hr at 20-25°C)

	Typical Value
Shear strength steel collars and pins ISO 1010123	>17Nm

## Typical heat resistance


### Hot Strength

Tested at temperature

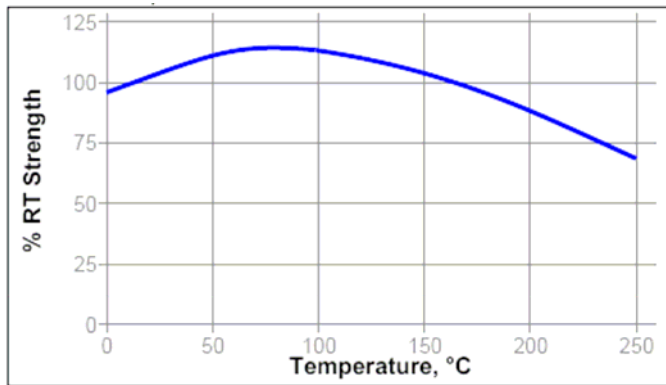

### Heat aging

Aged at temperature indicated and tested at 22°C

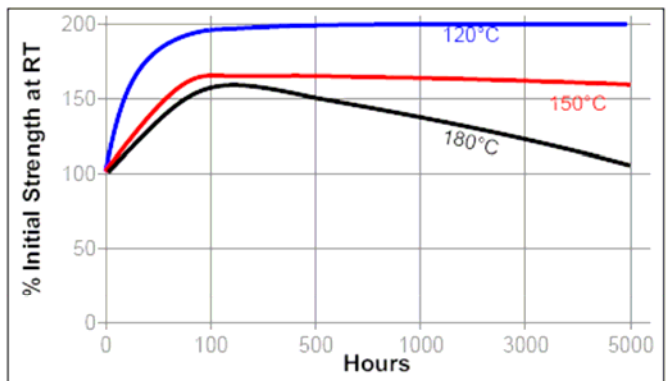

### General information

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be used with chlorine or other strong oxidising materials.

**For information on the safe handling of this product, consult the Material Safety Data Sheet, (MSDS).**

Where washing systems are used to clean the surfaces before bonding, it is important to check the compatibility of the washing solution with the adhesive. In some cases these solutions can affect the cure and performance of the adhesive.

### Directions for use

1. For optimum performance surfaces should be clean and free of grease (internal and external).
2. If the material is an inactive metal consider using activator.
3. Assemble and tighten as required.

4. For shrink fitted assemblies the product should be applied onto the pin, the collar should then be heated to create clearance for free assembly.
5. For slip fitted, apply product inside of the collar then to the leading edge of the pin, then use a rotating motion in assembly to ensure coverage.
6. For press fitted, apply product to both surfaces making sure of assembly at high press rates.

For disassembly

1. In circumstances where hand tools do not work, use localized heat to bolt or nut, disassemble while hot.

For cleanup

1. To remove cured product use a combination of solvent and abrasion such as a wire brush. .

### Precaution

1. Use with proper ventilation. Avoid contact with skin and eyes.
2. If contact with skin occurs, rinse with warm water or dissolve gradually with appropriate debonder.
3. Do not try to remove forcibly.
4. If adhesive gets into eye, keep eye open and rinse thoroughly. Seek medical attention immediately.
5. Keep well out of reach of children.

### Storage

Keep adhesive in a cool, dry place optimal storage 8°C-21°C, is recommended unless otherwise labelled. To prevent contamination of unused material, do not return any product to its original container. For specific shelf life information, contact Cartell UK Ltd.

**Disclaimer:** The data contained herein are furnished for informational purposes only and are believed to be reliable. However, Cartell UK Ltd does not assume responsibility for any results obtained by persons over whose methods Cartell UK Ltd has no control. It is the user's responsibility to determine the suitability of Cartell UK's products or any production methods mentioned herein for a particular purpose, and to adopt such precautions as may be advisable for the protection of property and persons against any hazards that may be involved in the handling and use of any Cartell UK Ltd's products. Cartell UK Ltd specifically disclaims all warranties express or implied, including warranties of salability and suitability for a particular purpose arising from sale or use of Cartell UK Ltd's products. Cartell UK Ltd further disclaims any liability for consequential or incremental damages of any kind including lost profits.

[Cartell UK Ltd](#)

Unit F, Harlow House, Shelton Road Willowbrook Industrial Estate, Corby,  
NN17 5XH, England

Tel: +44 (0) 1536 264222 Fax +44 (0) 1536 264333

[www.cartell-uk.com](http://www.cartell-uk.com) Email: [mail@cartell-uk.com](mailto:mail@cartell-uk.com) England No. 6585066

Vat No. 933311453